

Sanitär / Installation

Space-saving washing machine siphon set




Item No. 1950:

Description:

Space-saving washing machine trap made of impact-resistant polypropylene and rubber nipple for DN 32/40/50 outlet pipe, including DN 40 hose connections.

Technical Advantes:

- Easy cleaning thanks to 1" (AG) cleaning opening at the front
- Integrated odor trap with a sealing water height of 50 mm
- enclosed fixing clip prevents the trap from slipping out
- 90° and 180° connection nozzle suitable for hoses with an internal diameter of 8.2 - 26.5 mm
- Flow rate up to 36 l/min. depending on spout Ø
- Temperature resistance up to +95° C for short periods
- Extra narrow - maximum installation depth of 52 mm (incl. bracket)
- Very good chemical resistance
- also for condensate
- acc. to DIN EN 274

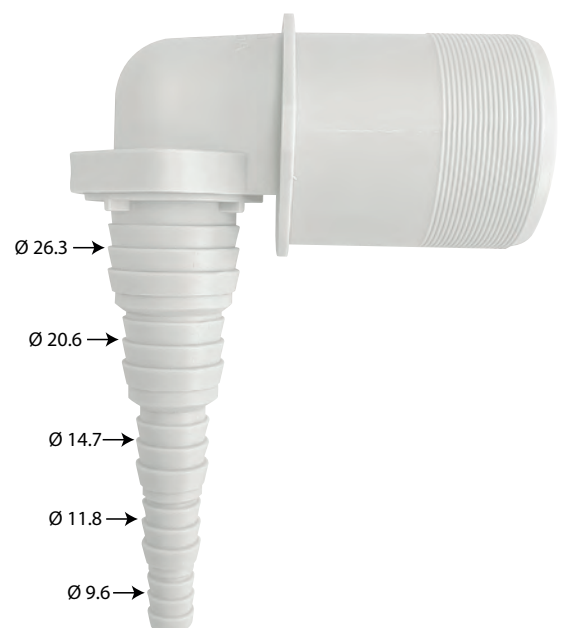

Sanitär / Installation

Space-saving washing machine siphon diff. versions

Item No. 1951:

Description:

Space-saving washing machine trap with rubber nipple for DN 32/40/50 outlet pipe, including DN 40 adapter, condensate connection nozzles with 8 mm and 10 mm condensate connections and two "SAVE" backflow preventers.



Item No. 1952:

Description:

Space-saving washing machine trap with rubber nipple for DN 32/40/50 outlet pipe, including DN 40 adapter, condensate connection nozzles with 8 mm and 3/4" condensate connections and two "SAVE" backflow preventers.

